



Maximize the impact of content with Chief's multi-monitor and flat panel display mounts, ceiling mounts, and carts and stands. Chief mounts assist in the visibility of digital signage, providing easy installation and flexible viewing options. Chief is prepared to take on any project from creation through logistics, understanding the specific requirements that go hand-in-hand with today's digital signage applications.



DIGITAL SIGNAGE MOUNTING SOLUTIONS

Chief understands the specific requirements that go hand-in-hand with digital signage to ensure proper flat panel placement and maximize the impact of the content. Providing strong, functional, aesthetically pleasing and easy-to-install products to help meet diverse needs is our top priority. Retailers, hotels and airports around the world integrate Chief mounts into innovative projects that showcase the best in technology. Choose from wall, ceiling or mobile styles, all which include varying degrees of flexible positioning.



ENTERTAINMENT



CAFES & SHOPS



CONCERTS



FIXED MOUNTS



TILT MOUNTS

MEDIUM


*MSMU™

Mounting Pattern Range 100 x 100 mm up to 650 x 400 mm



*MTMU™



Mounting Pattern Range 100 x 100 mm up to 650 x 400 mm



LARGE



*LSMU™

Mounting Pattern Range 200 x 200 mm up to 879 x 506 mm



*LTMU™


Mounting Pattern Range 200 x 200 mm up to 879 x 506 mm



EXTRA LARGE


XSMU™

Mounting Pattern Range 200 x 200 mm up to 1229 x 685 mm

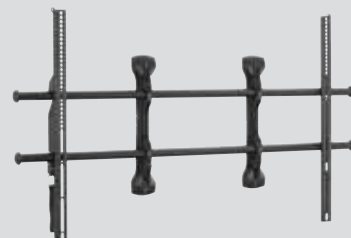

XTMU™

Mounting Pattern Range 200 x 200 mm up to 1229 x 685 mm





OUNTS



SWING ARM MOUNTS



CEILING MOUNTS

100 x 100 mm up to 667 x 400 mm

JWU™

Mounting Pattern Range 100 x 100 mm up to 400 x 400 mm

Extends 20.38" (518 mm)

45" / 75 lbs (34 kg)

JHSU™

Mounting Pattern Range 100 x 100 mm up to 400 x 400 mm

45" / 75 lbs (34 kg)

200 x 200 mm up to 895 x 506 mm

MWRU™

Mounting Pattern Range 100 x 100 mm up to 709 x 431 mm

Extends 24.88" (632 mm)

50" / 125 lbs (56.7 kg)

PWRU™ (also available)

MCSU™

Mounting Pattern Range 100 x 100 mm up to 709 x 431 mm

55" / 125 lbs (56.7 kg)

200 x 200 mm up to 1249 x 685 mm

PDRU™

Mounting Pattern Range 200 x 200 mm up to 862 x 517 mm

Extends 38.38" (949 mm)

71" / 200 lbs (90.7 kg)

PNRU™ (also available)
Extends 24.88 (63.2 cm)

PCSU™

Mounting Pattern Range 200 x 200 mm up to 862 x 517 mm

71" / 200 lbs (90.7 kg)

PDCU™ (also available)
Dual Ceiling Mount
up to 350 lbs (158.7 kg)



CARTS & STANDS

PF1™



Mounting 200 x 200 mm up to
Pattern Range 862 x 517 mm



PF2™ (also available)
Dual Display Stand for displays
up to 71" and 200 lbs (90.7 kg)

PFC™



Mounting 200 x 200 mm up to
Pattern Range 862 x 517 mm



PFM™




Mounting 200 x 200 mm up to
Pattern Range 862 x 517 mm



PROJECTOR MOUNTS

RPA Elite™







- RapidFire™ dual disconnect system for fast installation and lamp/filter access
- MicroZone™ adjustment for fast and precise projector registration
- Q-Lock™ integrated security
- Custom and universal interface options


FUSION SERIES MOUNTS

DISCOVER THE 4 C'S OF MOUNTING

- 1** **CENTERLESS™ LATERAL SHIFT**
Get up to 16" of post-installation lateral shift - 8" left/right of uprights.
- 2** **CONTROLZONE™ HEIGHT & ROLL ADJUSTMENT**
Fine-tune height and leveling after the mount is installed by inserting an Allen key into the ports located at the top of the uprights.
- 3** **CENTRIS™ LOW-PROFILE TILT**
Provides effortless tilting by using the center of gravity to balance the screen – no tools necessary!
- 4** **CLICKCONNECT™ TOOL-LESS LATCHING**
Hear an audible click when the screen safely engages with the mount. Use the built-in cable stand to gain easy access under the screen.

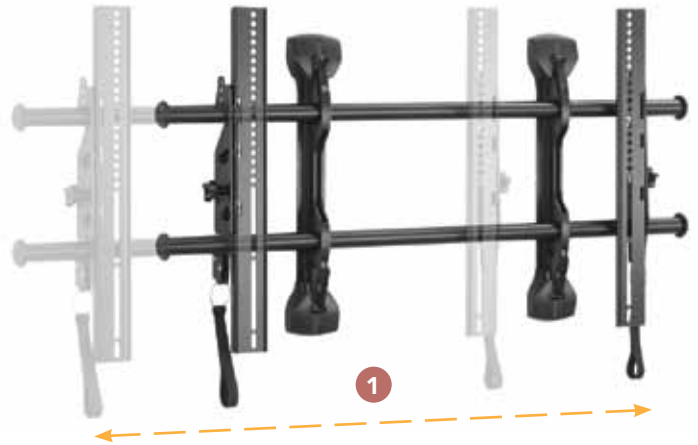

ADD ACCESSORIES TO CREATE A CUSTOM CONFIGURATION

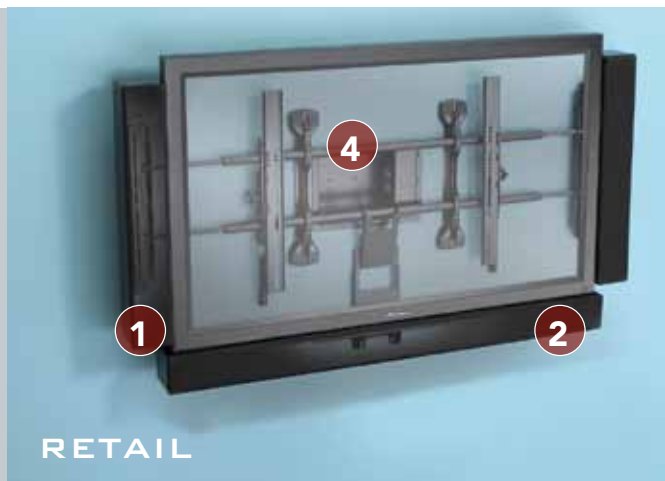

RETAIL



FRONT DESK



* FCK008 recommended when installing 37-42" screens on L-series of Fusion. All others can use the FCK016.

** Can be used with FCS100, FCC100 or FVS100/150 shelves.

ACCESSORY SHELVES

PAC102B™

- Shelf for pole installations
- Weight Capacity: 20 lbs (9.1 kg)
- All mounting hardware included for 1.5" NPT installation



PAC150™

- Video conferencing shelf
- Compatible with 8" (203 mm) and 14" (356 mm) Q-latch pattern mounts
- Weight Capacity: 10 lbs (4.5 kg)
- Height Adjustable: 5.25"



PAC710™

- Carts and stands accessory self
- Easy to install and adjust
- Weight Capacity: 25 lbs (11.34 kg)
- Compatible with PFC, MFC, PF1, MF1, PF2 and MF2 products



DUAL DISPLAY ACCESSORY

PAC720™

- Infinitely height adjustment
- Ships fully assembled
- Weight Capacity: 200 lbs (90.7 kg)
- Compatible with PFC, and PF1 products.



SPEAKER ADAPTERS

PACCC1™

- Fully assembled
- Low profile
- Expandable for 30 - 50" Flat Panels
- Compatible with 8" (203 mm) and 14" (356 mm) Q-Latch patterns



PACLR1™

- Fully assembled
- Low profile
- Expandable for 30 - 50" Flat Panels
- Compatible with 8" (203 mm) and 14" (356 mm) Q-Latch patterns



MEDIA ADAPTER

PAC251™

- Adapts to 14" (356 mm) Q-Latch pattern
- Easy access to drives and connections
- Compatible with media devices up to: (WxHxD) 14.5 x 16 x 4.5" (368 x 406 x 114 mm)



MAC251™ for M-series Q-Latch products

EXTENSION COLUMNS

CMS™ Fixed & Adjustable

- Fixed or Adjustable Extension Columns available
- Weight Capacity: 500 lbs (227 kg)
- Cable management
- Available in black, silver and white



CEILING PLATES

CMA372™

- Offset Unistrut Adapter
- Features offset for transactioning cables out of extension columns
- Including spring nuts and bolts to attach to 1.63" (41 mm unistrut)
- Weight Capacity: 500 lbs (227 kg)



CMA330™

- Offset Ceiling Plate
- Offset provides cable exit when mounting to flat ceiling surfaces
- Offset Height: 1.75" (45 mm)
- Weight Capacity: 500 lbs (227 kg)



CMA395™

- Angled Ceiling Plate
- Adjustable for installaion on angled ceilings
- Weight Capacity: 500 lbs (227 kg)
- Available in black and white



Distribuido por:  | T +34 976 572 279 • F +34 976 573 673 • www.tecco.net

Chief Manufacturing ■ A Division of Milestone AV Technologies ■ 800.582.6480 USA ■ 877.345.4329 Canada ■ www.chiefmfg.com