



# FASTER INSTALLATION, FASTER SERVICE.


## New RapidFire Projector Interface

Chief's newly designed RapidFire interface bracket seamlessly replaces the previous SLBU included with the RPA Elite series projector mounts. Easier installation, and innovative lamp and filter access after installation make the RPA Elite an even better choice for your next installation.



SLBU™

### EASY 3-STEP INSTALL



**STEP 1**  
Attach height-adjustable mounting buttons to projector



**STEP 2**  
Latch legs onto mounting buttons



**STEP 3**  
Attach interface to legs

### FASTER INSTALLATION

New 3-step assembly saves time on every projector installation

### FASTER SERVICE

Quick-disconnect at projector allows unlimited lamp and filter access



### ON-SITE TOOL STORAGE

Includes secure storage tray for hex keys

**SIMPLIFIED ALL-POINTS™ SECURITY**  
Secure projector with just one tamper-resistant screw size (qty. 4)



### SEAMLESS UPGRADE

Replaces previous SLBU included with all RPA Elite series projector mounts

### SPECIFICATIONS

Height	1.45 - 1.9" (37 - 48 mm)
Color	<input type="checkbox"/> <input checked="" type="checkbox"/> S <input type="checkbox"/> W
Weight Capacity	50 lbs (22.7 kg)

### RECOMMENDED ACCESSORIES



**CMS440** ■ Above-Tile Suspended Ceilings Kit



**SEC2** ■ Security Cable Kit



**PX2W** ■ Power Conditioner Outlet



**CMS** ■ Adjustable Extension Columns



**CMA470** ■ Above-Tile Storage Accessory



**LSB101** ■ Lateral Shift Accessory



# SEAMLESS INTEGRATION.

## RPA Elite Featuring New RapidFire™ Universal Interface

Chief's innovative new RapidFire universal interface features an industry-first dual-disconnect interface for faster installation and easier lamp and filter access. RPA Elite projector mounts also include innovative features, such as MicroZone™ Adjustments, Q-Lock™ Integrated Security Locking Lever, and Centris™ Technology for fingertip adjustments.



### FEATURES



#### RAPIDFIRE

Easy filter access. Dual disconnect system for fast installation and lamp/filter access.




#### MICROZONE

Precise and fast projector registration, including flush-mount installations, with micro-adjustment for roll, pitch, and yaw.



#### CENTRIS TECHNOLOGY

Enables effortless fingertip positioning. Self adjusts to support different projector weights.

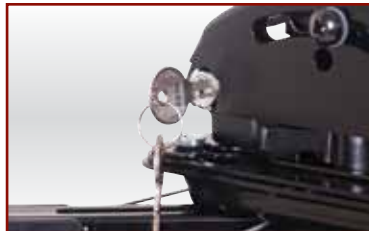

#### Q-LOCK

Provides quick connect/disconnect of the projector for service and enhanced security with an integrated key and lock system.

### SPECIFICATIONS

Roll	±3°
Pitch	±20°
Yaw	360°
Dimensions* H x W x D	6.5" x 2.75" x 5.5" (165 x 69 x 140 mm)
Color	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Weight Capacity	50 lbs (22.7 kg)

\* Height does not include interface bracket

### ORDERING\*

Custom	RPM(A/B/C)XXXX**	<input type="checkbox"/>
Universal	RPM(A/B/C)U**	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>

\* See Chief's Online MountFinder at [www.chiefmfg.com](http://www.chiefmfg.com)

\*\* For Q-Lock integrated security, order RPMA, RPMB, or RPMC with A, B, and C designating the key option

Note: Default color is black. To specify silver or white, add "S" or "W" to end of model number.

end-user focused

faster installation

superior service

proven quality

CHIEF MANUFACTURING  
USA/INTERNATIONAL  
CHIEF MOUNTS CANADA  
MILESTONE EUROPE B.V.  
MILESTONE ASIA PACIFIC LTD

■ A DIVISION OF MILESTONE AV TECHNOLOGIES ■ [www.chiefmfg.com](http://www.chiefmfg.com)  
 ■ P 800.582.6480/952.894.6280 ■ F 877.894.6918/952.894.6918 ■ [chief@chiefmfg.com](mailto:chief@chiefmfg.com)  
 ■ P 877.345.4329 ■ F 888.377.5314 ■ [info@chiefmounts.ca](mailto:info@chiefmounts.ca)  
 ■ P 31 (0)40 23 24 700 ■ F 31 (0)40 23 24 710 ■ [europe@milestone.com](mailto:europe@milestone.com)  
 ■ P 852 2145 4099 ■ F 852 2145 4477 ■ [asia.chief@milestone.com](mailto:asia.chief@milestone.com)

©2009 Milestone AV Technologies, a Duchossois Group Company. 9000013A 3/09. Chief is a registered trademark of Milestone. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

