Stewart FILMSCREEN

Director's Choice

Director's Choice is the ultimate marriage of the world's finest screen material and the most precise masking system available

Director's Choice

Director's Choice is the ultimate marriage of the world's finest screen material and the most precise masking system available. Our revolutionary Binary Reciprocal Intelligent Control nicknamed "The BRIC" allows precision recall of all standard and custom aspect ratios to be set with ease, eliminating the need for multiple controllers. Compatible with most infrared remotes, RS-232, and RS-422 control systems, this unique product reduces programming time to a matter of minutes.

The Director's choice is easy to fine tune and operate ensuring a perfectly masked image no matter what the aspect ratio. Never again must you cope with unsightly black bars or image cropping.

Optimize your Director's Choice with Stewart's award-winning front or rear projection materials. Microperf X2 is available when acoustic transparency is required (acoustically transparent panels also available upon request).

Stewart's exclusive VeLux™ black-velvet appliqué gives the Director's Choice a luxurious look and feel. This specialized frame finish absorbs possible over-scan while boosting perceived contrast.

Sit back, relax, and enjoy the same precision quality and perfect picture that is preferred by film and TV directors all over the world with the Director's Choice.

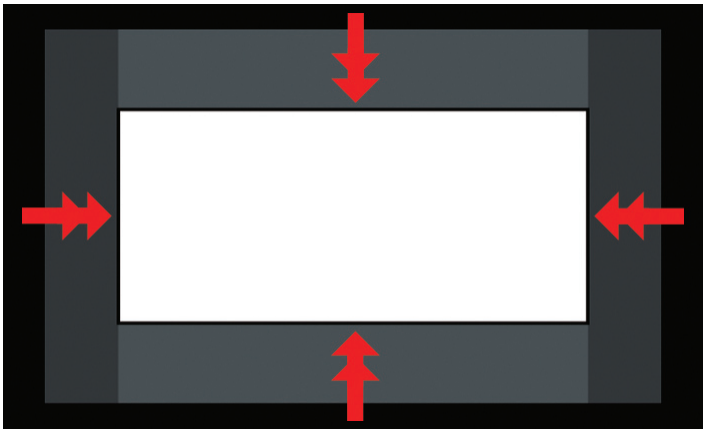

Horizontal panel drops down from above the image while the other rises from below. Vertical panels glide inward from both the left and right side to create a perfectly masked image.

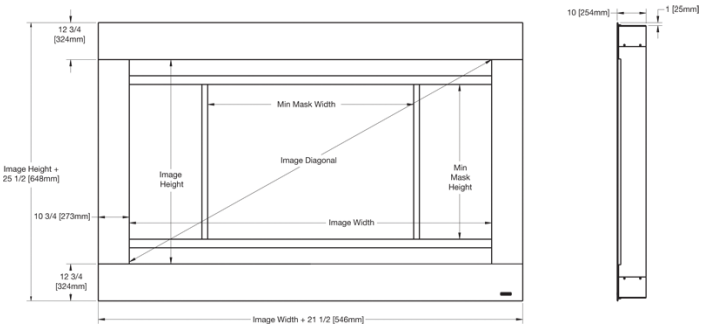

SPECIFICATIONS

Aluminum extrusion framing system	**Included**
Horizontal and vertical masking panels	**Included**
Specialized snap-fastening system	**Included**
VeLux™ appliqué finish	**Included**
MATERIAL	
Front projection material	**Included**
Rear projection material	**Optional**
PERFORATIONS	
Microperf X2 THX Ultra	**Optional**
Cinemaperf	**Optional**
Acoustically transparent masking panels	**Optional**
MOUNTING	
Aperture	**Included**
Wall	**Optional**
MASKING MOTOR	
120 Volt	**Included**
220 Volt	**Optional**
MASKING CONTROL	
BRIC - includes IR remote and keypad	**Included**
FRAME OUTER DIMENSIONS	
Frame height	**Image Height + 24" (610 mm)**
Frame width	**Image Width + 20" (508 mm)**

For custom sizes and gains, please consult the WebSA or your local Stewart representative.

Stewart FILMSCREEN

Distribuido por: TECCO SISTEMAS A/V | T +34 976 572 279 • F +34 976 573 673 • www.tecco.net

1161 Sepulveda Blvd Torrance CA 90502 USA 800.762.4999 I Tel: 310.784.5300 I Fax: 310.326.6870 I Email: sales@stewartfilm.com I www.stewartfilmscreen.com
© Stewart Filmscreen Corporation, specifications are subject to change without notice.